

# 01 SPOT LIGHT

## SPECIFICATIONS

Power consumption	23.5W
Weight	0.96kg
Body Materials	Die-cast aluminum Aluminum extrusion Powder coating painted
Lens Materials	Polycarbonate
CRI	Ra ≥ 80 Ra ≥ 90 Ra ≥ 97
Kelvin	3000 <span style="color: yellow;">■</span> 3500 <span style="color: gray;">■</span> 4000 <span style="color: blue;">■</span>




Black



Gray

VOLTAGE 200-220	LED SYS COB	POWER UNIT INSIDE	T/A 130	RoA 380	CONNECT TRACK
CONNECT CEILING	CRI Ra ≥ 80	CRI Ra ≥ 90	CRI Ra ≥ 97	PROTECTION MODE IP20	LIFE TIME 40000h

## DRAWING

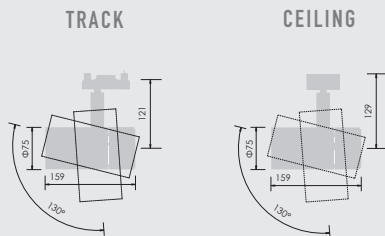

## ADAPTOR



3 Circuits Track

Single Track




CEILING

# 01 SPOT LIGHT




## OPTICAL DATA $Ra \geq 90$






Narrow






Medium



Wide



Very Wide



## POWER SUPPLY / DIMMER SWITCH

## OPTIONAL ACCESSORIES



Standard Equipment

Hood for glare cut 20d  
HLD-7520



Hood for glare cut 40d  
HLD-7540



Edge smoothing Lens  
ES-60



Diffusion Lens  
DL-60/1.5



Diffusion Lens  
DL-60/3.0



Diffusion Lens  
DL-60/4.5



Spread Lens  
SL-60



Honeycomb Louver  
HL-60

SUMI  
Mini  
retrofit

SUMI  
S  
around  
10w

SUMI  
M  
around  
15w

SUMI  
MM  
around  
20w

SUMI  
L  
around  
27w

SUMI  
Mega  
around  
35w