


# 01 SPOT LIGHT

## SPECIFICATIONS

|                   |  |
|-------------------|--|
| Power consumption | 9.9W / 10.5W   |
| Weight            | 0.52kg   |
| Body Materials    | Die-cast aluminum<br>Aluminum extrusion<br>Powder coating painted  |
| Lens Materials    | Polycarbonate  |
| CRI               | Ra ≥ 80<br>Ra ≥ 90<br>Ra ≥ 97  |
| Kelvin            | 2700 <span style="color: orange;">■</span><br>3000 <span style="color: yellow;">■</span><br>3500 <span style="color: gray;">■</span> |

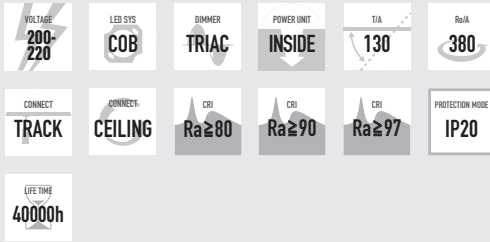

HLD-6040



HLR-6030




Black



Gray

## DRAWING

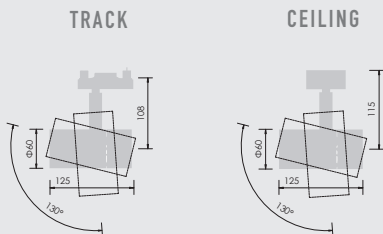

## ADAPTOR



3 Circuits Track

Single Track




CEILING

# 01 SPOT LIGHT




## OPTICAL DATA $Ra \geq 90$






Narrow






Medium



Wide



Very Wide



## POWER SUPPLY / DIMMER SWITCH



Recommended Dimmer Switch  
 WDF-57026K

## OPTIONAL ACCESSORIES



Standard Equipment  
 Hood for glare cut 20d  
 HLD-6020



Hood for glare cut 40d  
 HLD-6040



Anti glare Reflector  
 HLD-6030



Edge smoothing Lens  
 ES-54



Diffusion Lens  
 DL-54/1.5



Diffusion Lens  
 DL-54/3.0



Diffusion Lens  
 DL-54/4.5



Spread Lens  
 SL-54



Honeycomb Louver  
 HL-54