


03 STANDARD DOWN LIGHT DOWN SPOT

SPECIFICATIONS










| | | | |
|---------------------|---|--------|--|
| Power consumption | 13.8W | CRI | Ra ≥ 80 Ra ≥ 90 |
| Weight | 0.58kg | | |
| Body Materials | Die-cast aluminum Aluminum extrusion Powder coating painted | Kelvin | 2700 ■ 3000 ■ 3500 ■ |
| Reflector Materials | Polycarbonate | | |

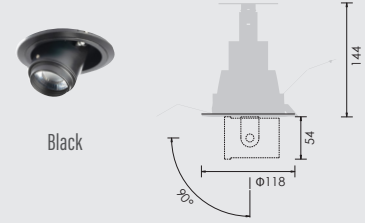

Black



OPTICAL DATA Ra ≥ 90

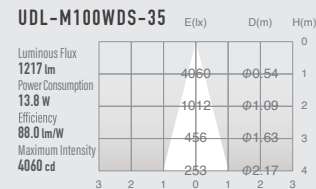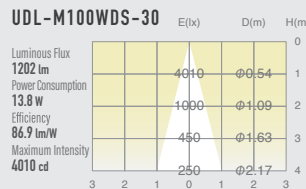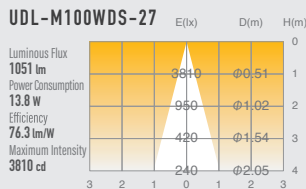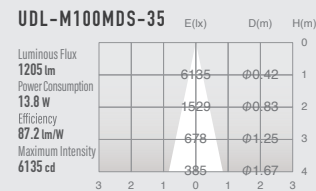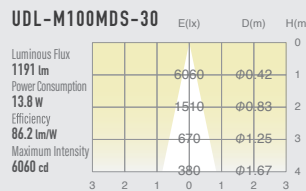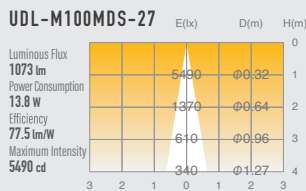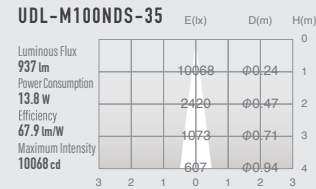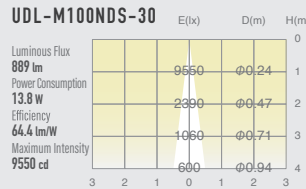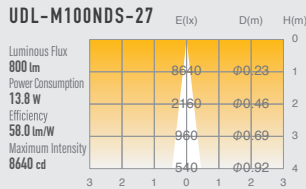

POWER SUPPLY / DIMMER SWITCH



Suitable Power supply for NonDimmable
ECIV037211S



Suitable Power supply for Dimmable
ECIV037211JP-D



Recommended Dimmer Switch
WTFD 57626

OPTIONAL ACCESSORIES



Honeycomb Louver
HL-54

SUMI Mini retrofit
SUMI S around 10w
SUMI M around 15w
SUMI MM around 20w
SUMI L around 27w

SUMI Mega around 35w