



02 GLARELESS DOWN LIGHT ADJUSTABLE

SPECIFICATIONS

Power consumption 14.3W / 15.4W


Weight 0.3kg

Body Materials Die-cast aluminum
Powder coating painted

Lens Materials Polycarbonate


CRI Ra ≥ 80
Ra ≥ 90
Ra ≥ 97

Kelvin 2700 ■
3000 ■
3500 ■
4000 ■

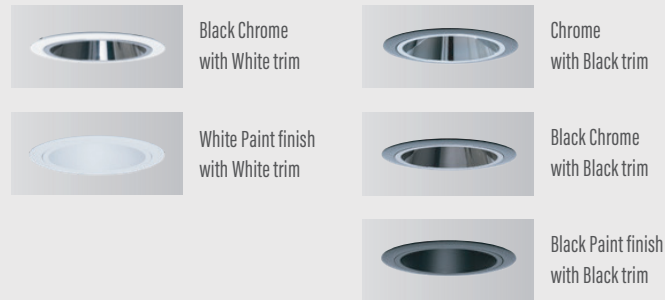

DIMMER 0-10V	POWER UNIT OUTSIDE	TIA 30°	Ra/A 355	CUT OUT 75	GLARE CUT 35
CRI Ra ≥ 80	CRI Ra ≥ 90	CRI Ra ≥ 97	PROTECTION MODE IP20	LIFE TIME 40000h	

DRAWING






02 GLARELESS DOWN LIGHT ADJUSTABLE

OPTICAL DATA Ra ≥ 90




Narrow


UDL-M75NAGL-27

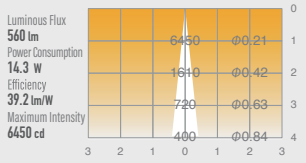


UDL-M75NAGL-30

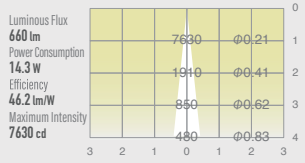

UDL-M75NAGL-35

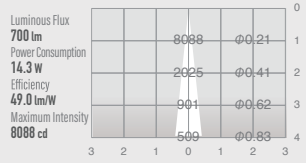


UDL-M75NAGL-40

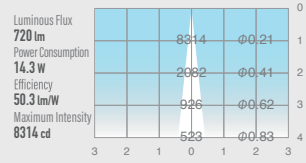


Medium


UDL-M75MAGL-27

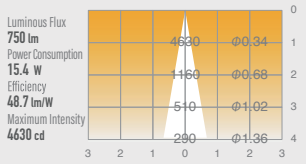


UDL-M75MAGL-30

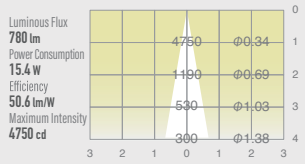

UDL-M75MAGL-35

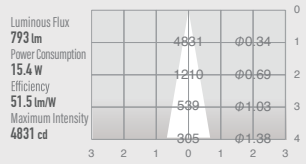


UDL-M75MAGL-40

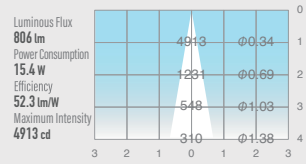


Wide


UDL-M75WAGL-27

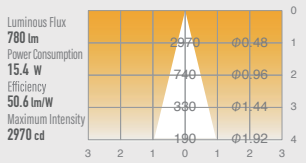


UDL-M75WAGL-30

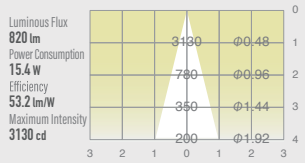

UDL-M75WAGL-35

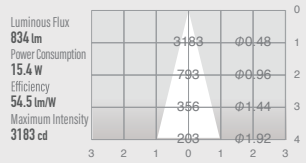

UDL-M75WAGL-40

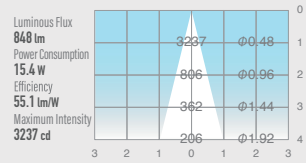

POWER SUPPLY / DIMMER SWITCH



Suitable Power supply for NonDimmable
ECIV03211JS



Suitable Power supply for 0-10V Dimmable
ECIV03211JP-D



Recommended Dimmer Switch
WTFD 57626

OPTIONAL ACCESSORIES



Edge smoothing Lens
ES-54



Diffusion Lens
DL-54/1.5



Diffusion Lens
DL-54/3.0



Diffusion Lens
DL-54/4.5



Spread Lens
SL-54



Honeycomb Louver
HL-54