


01 SPOT LIGHT

SPECIFICATIONS

Power consumption	13.2W / 14.0W
Weight	0.52kg
Body Materials	Die-cast aluminum Aluminum extrusion Powder coating painted
Lens Materials	Polycarbonate
CRI	Ra ≥ 80 Ra ≥ 90 Ra ≥ 97
Kelvin	2700 ■ 3000 ■ 3500 ■

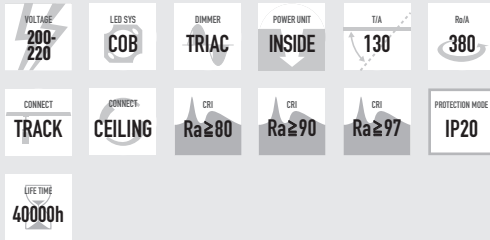

HLD-6040



HLR-6030




Black



Gray

DRAWING

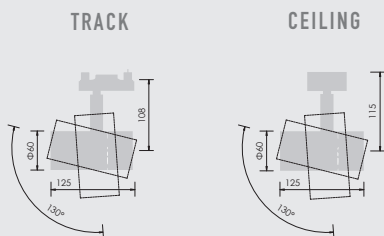

ADAPTOR



3 Circuits Track

Single Track




CEILING

01 SPOT LIGHT




OPTICAL DATA $Ra \geq 90$






Narrow






Medium



Wide



Very Wide



POWER SUPPLY / DIMMER SWITCH



Recommended Dimmer Switch
 WDF-57026K

OPTIONAL ACCESSORIES



Standard Equipment
 Hood for glare cut 20d
 HLD-6020



Hood for glare cut 40d
 HLD-6040



Anti glare Reflector
 HLD-6030



Edge smoothing Lens
 ES-54



Diffusion Lens
 DL-54/1.5



Diffusion Lens
 DL-54/3.0



Diffusion Lens
 DL-54/4.5



Spread Lens
 SL-54



Honeycomb Louver
 HL-54

SUMI
Mini
retrofit

SUMI
S
around
10w

SUMI
M
around
15w

SUMI
MM
around
20w

SUMI
L
around
27w

SUMI
Mega
around
35w