


01 SPOT LIGHT

SPECIFICATIONS


| | |
|-------------------|--|
| Power consumption | 35.0W |
| Weight | 1.16kg |
| Body Materials | Die-cast aluminum Aluminum extrusion Powder coating painted |
| Lens Materials | Polycarbonate |
| CRI | Ra ≥ 80 Ra ≥ 90 Ra ≥ 97 |
| Kelvin | 3000 ■ 3500 ■ 4000 ■ |



Black

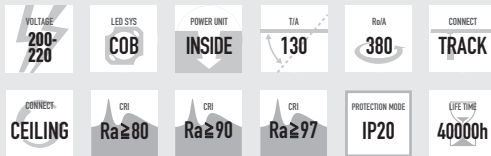

DRAWING






01 SPOT LIGHT




OPTICAL DATA $Ra \geq 90$






Narrow






Medium



Wide



Very Wide



POWER SUPPLY / DIMMER SWITCH

OPTIONAL ACCESSORIES



Standard Equipment

Hood for glare cut 20d
HLD-7520



Hood for glare cut 40d
HLD-7540



Edge smoothing Lens
ES-60



Diffusion Lens
DL-60/1.5



Diffusion Lens
DL-60/3.0



Diffusion Lens
DL-60/4.5



Spread Lens
SL-60



Honeycomb Louver
HL-60

SUMI
Mini
retrofit

SUMI
S
around
18w

SUMI
M
around
15w

SUMI
MM
around
20w

SUMI
L
around
27w

SUMI
Mega
around
35w